

Active Safe Driving Assistant Terminal AI100



Features:


- ADAS supports LDW (Lane Departure Warning) / FPW (Front Vehicle Approach Warning) / FCW (Forward Collision Warning) and other warning functions
- DSM supports Fatigue (Yawning) / Looking around / Smoking / Phone Call / Covering/ Infrared blocking / Driver abnormal and other warning functions
- DSM camera supports four modes of installation: left rudder, right rudder, center control, and rearview mirror
- It can support for USB link Android debugging
- It supports multi-voice broadcast, voice file flexible replacement, no country and language restrictions
- It is suitable for many product models, and it supports Tongli full series with IPC network port equipment
- It combines local alarm and background remote monitoring functions, which can provide security services for drivers, passengers, operating units and regulatory departments. It can effectively avoid the occurrence of dangerous situations
- Professional on-board power supply set 8-32V dc wide voltage input design

Product Parameters:

Item	Name	Parameter
Mainframe	CPU	4x1GHz Embedded processor
	RAM	512MB DDR3
DSM Camera	Resolution	960H
	Fps	25fps
ADAS Camera	Resolution	1280*720
	FPS	25fps
Alarm Picture and Video	Alarm picture	Format: JPG
	Alarm video	H.264, Format:mp4
	CVBS output	Multiple channel output,ADAS、 DSM、 BSD video
Working Voltage	DC wide voltage	DC 8-32V
Temperature Range	Temperature range	-20° ~+70°
Product Size	Size (mm)	133.6*102.8*33

Mainframe and interface:

Front Board:

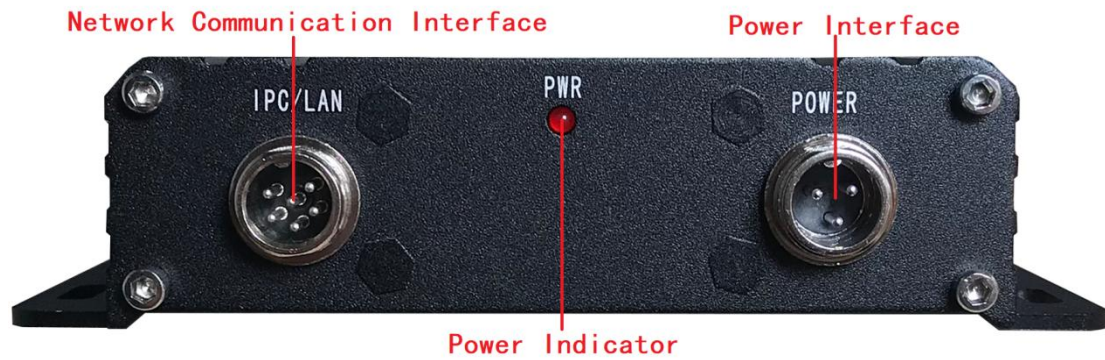

Back Board:

