

Megapixel IP Camera User Manual



Before you use this product, please read the introduction

1. Main Parts & Accessories



Main Part
(1PCS)



Plastic wall nail(3pcs)
Assorted screw(3pcs)




"L"hexagon wrench
(1pcs)




User Manual
(1pcs)

2. Connection Diagram

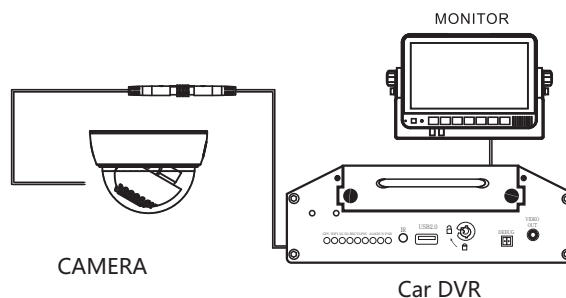

3. RJ45 Connector

4. Size



4. Notes

- (1) Make sure the power is off before installation.
- (2) Check and confirm the availability of right power supply. Wrong voltage will inflict damage to component(s) in camera.
- (3) Do not use camera in overheated and humid environment. Keep a good ventilation so as to reduce fire and outage.
- (4) Only the professional technicians are entitled for installation and repair. By no means, this camera shall not be repaired or dismantled on customer's own. Manufacturer holds no responsibility in case of unauthorized repair, and use of uncertified spare parts.
- (5) If abnormal conditions are found, please turn off the power supply and contact the local dealers in time.

Camera	Image Sensor	1/3" CMOS
	Horizontal Resolution	2.0MP
	Minimum Illumination	Color: 0.01Lux/F1.2 (0Lux with IR)
	S/N	≥52dB (AGC OFF)
	Day and night switch	ICR IR filter automatically switches
	Electronic Shutter	1/25S ~ 1/10000S
	IR LEDS Quantity	12 Pcs LEDs
	IR distance	8 meters
Lens	Lens focal length	1.44mm (Ceiling mounted :360°,Wall mounted: 180°)
	Lens mount	M12*P0.5
Video Processing	Video compression standard	H.264\H.265
	Video resolution	Main stream: 1920×1080 ; Sub stream:704*576 ,640*360 , 352*288
	Video frame rate	1080P(25fps)
Audio	Audio	G.711U
	Audio input	Built-in Mic Optional
Network Function	Network Protocol	Support: HTTP, TCP/IP, IPv4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP
	Access Protocol	Support ONVIF Protocol
Interface	Communication interface	10/100M adaptable Ethernet interface, RJ45
General Specification	Waterproof grade	IP65
	Operating Temperature	-20°C ~ +70°C
	Power Supply	DC12V±10%
	Power Consumption	≤ 3W