

Megapixel IP Camera User Manual



Before you use this product, please read the introduction

1. Main Parts & Accessories



Main Part
(1PCS)




Assorted screw
(2pcs)




User Manual
(1pcs)

2. Connection Diagram

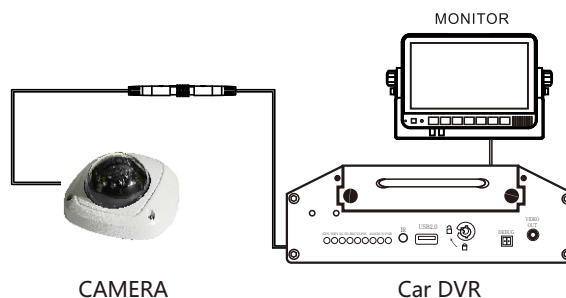

3. RJ45 POE Connector

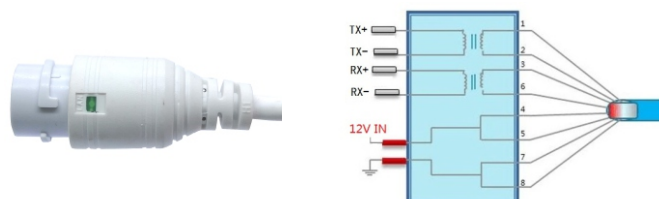

4. Notes

- (1) Make sure the power is off before installation.
- (2) Check and confirm the availability of right power supply. Wrong voltage will inflict damage to component(s) in camera.
- (3) Do not use camera in overheated and humid environment. Keep a good ventilation so as to reduce fire and outage.
- (4) Only the professional technicians are entitled for installation and repair. By no means, this camera shall not be repaired or dismantled on customer's own. Manufacturer holds no responsibility in case of unauthorized repair, and use of uncertified spare parts.
- (5) If abnormal conditions are found, please turn off the power supply and contact the local dealers in time.

Camera	Main processor	FH8852V200
	Image Sensor	1/2.9" CMOS GC2063
	Horizontal Resolution	3.0MP/2.0MP (standard)
	Minimum Illumination	Color: 0.01Lux/F1.2 (0Lux with IR)
	S/N	≥69dB (AGC OFF)
	Day and night switch	ICR IR filter automatically switches
	Electronic Shutter	AUTO,1/25S ~ 1/10000S
	IR LEDS Quantity	10 Pcs LEDs
	IR distance	8 meters
Lens	Lens focal length	3.6mm
	Lens mount	M12*P0.5
Video Processing	Video compression standard	H.264\H.265
	Video resolution	Main stream: 2304x1296,1920x1080,1280x720 ; Sub stream:800x448 ,704x576,640x360,352x288
	Video frame rate	200W(25fps)
Network Function	Network Protocol	Support: P2P , CGI , HTTP , TCP/IP , IPv4 , RTSP , UDP , NTP , DHCP , DNS , IP Filter
	Access Protocol	Support ONVIF Protocol
Interface	Communication interface	10/100M adaptable Ethernet interface, RJ45
General Specification	Waterproof grade	IP65
	Protection grade	IK08
	Operating Temperature	-20°C~+70°C
	Power Supply	DC12V±10%
	Power Consumption	≤ 3W

The contents of this manual are for reference only